

O Z O N E

Ozone

66 rue Notre Dame de Nazareth
75003 Paris


TECHNICAL DATA : Luxembourg C GM

(please see conditions below)

Done on-line on July 23 2018





DESCRIPTION : Chandelier. The structure is in aluminium. Finish is Bronze anodizing. The shade is in white sand blasted PMMA.
Warm white LED down lighting, 270W, 10100Lumens
Converter 24V outside the lamp, to be placed in a distant box, not included.
Weight: 28kg.
Size: 120x120x5cm.
Compliance: CE Class III.

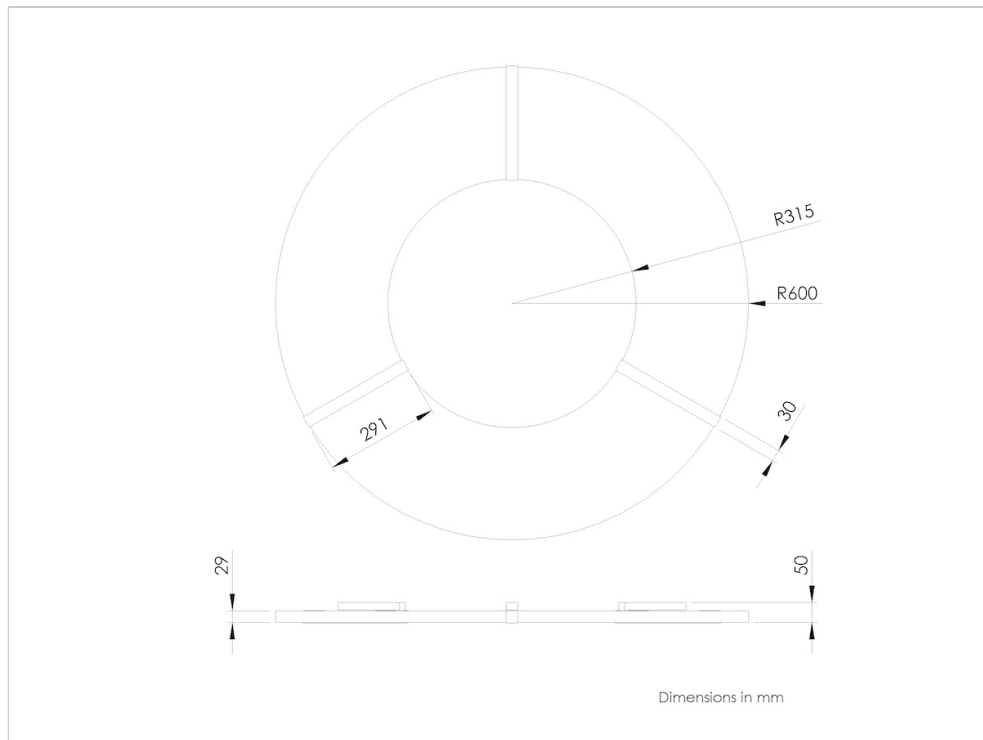

FUNCTION : The lighting provides a diffusing down light, softening the shadows.
The light output is 10100 Lumens equivalent to a 10x100W incandescent bulb.
The light intensity can be dimmed from 0 to 100%.
A warm light is produced by Eurocomposant brand LED PCB 2700°K, with a CRI>90 and a yield of 80lm/W. Energy efficiency: A+.

ELECTRICAL CONNECTION : The lighting consumes 270W, is supplied with three 24V power supplies and is designed to receive a remote constant voltage power supply 24V. We recommend the use of three power supplies MEANWELL PLC-100-24 with ELDOLED LINEARdrive 211D driver witch allows optimal 0-10V dimming from 0 to 100%. They must be placed in an accessible and ventilated place.
Make sure the cable length between power supply and light and their section apply to the attached diagram.
The cables must not cross the screws of the plate.

IMPORTANT:
Remote power supply 24V.
6 wires for power supply.
0-10V or DALI dimming.

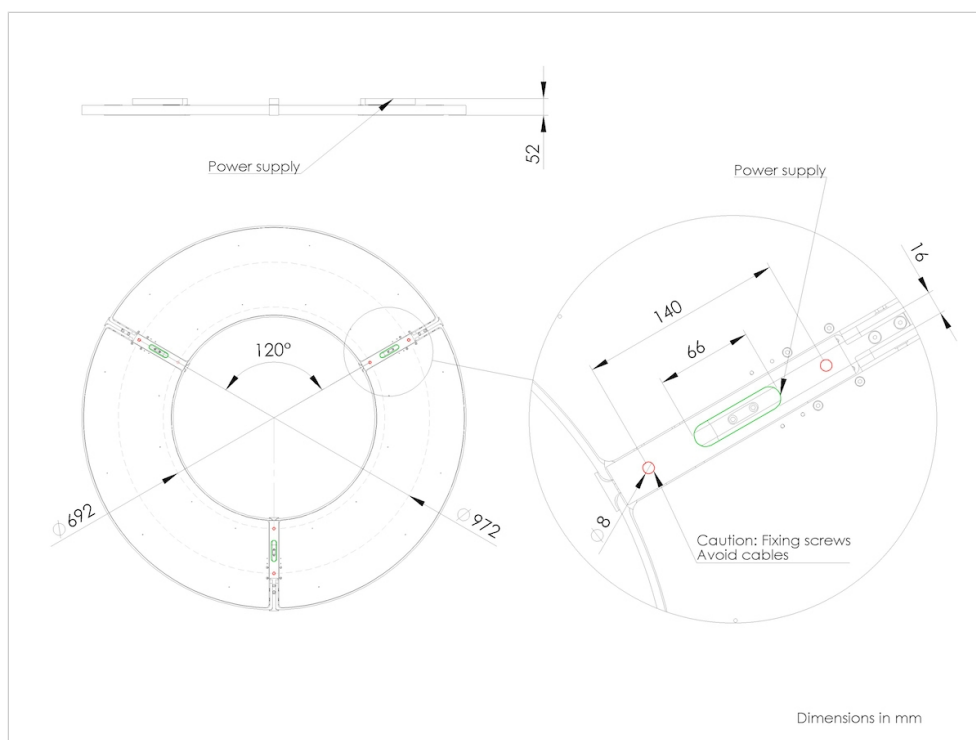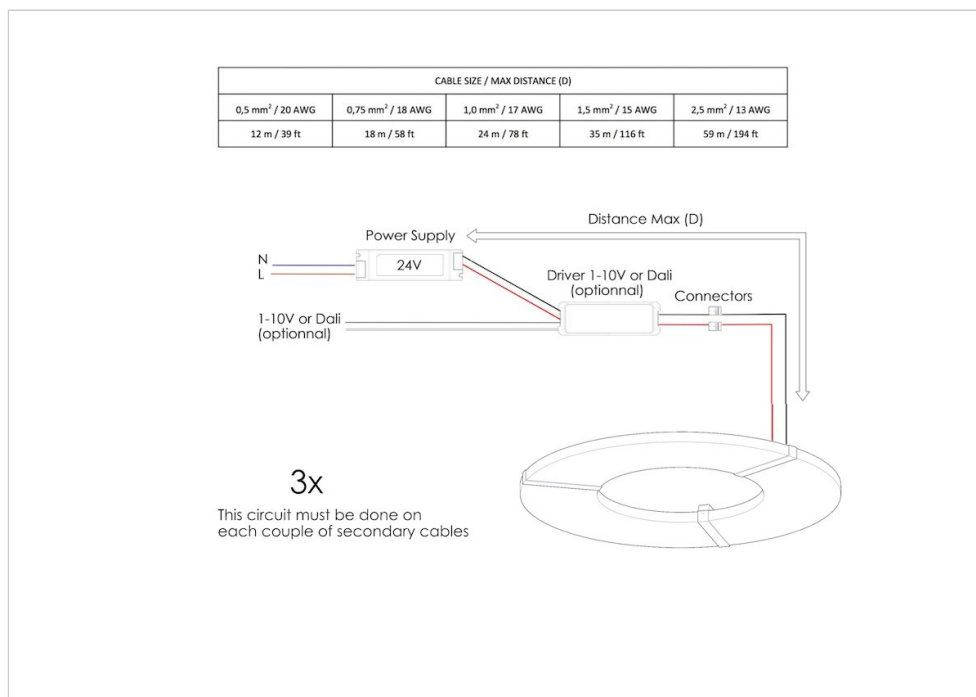

MECHANICAL FASTENING : MECHANICAL FASTENING



If necessary please reinforce the ceiling at the plate. Make sure that the ceiling is straight. The fixation of the plate is realized with screws, see the map. Use the appropriate method according to the materials on which it will bind. Lamp Weight: 28kg. Drill avoiding electrical cables.


IMPORTANT:

If necessary please reinforce the ceiling at the plate.


Weight: 28kg.


Make sure that the ceiling is straight.

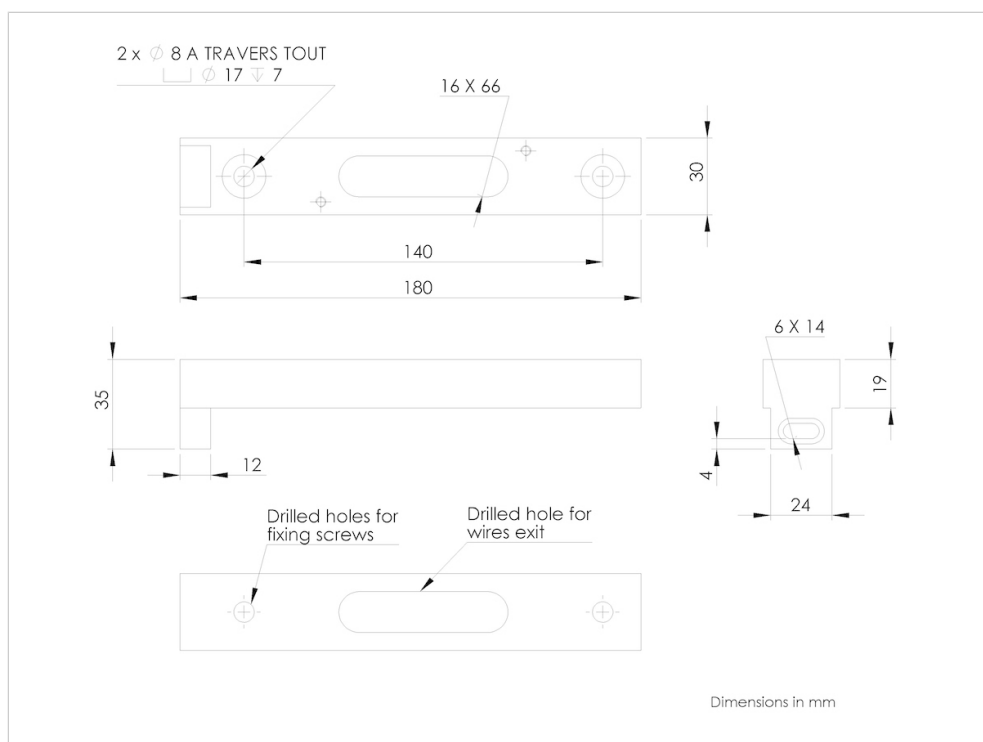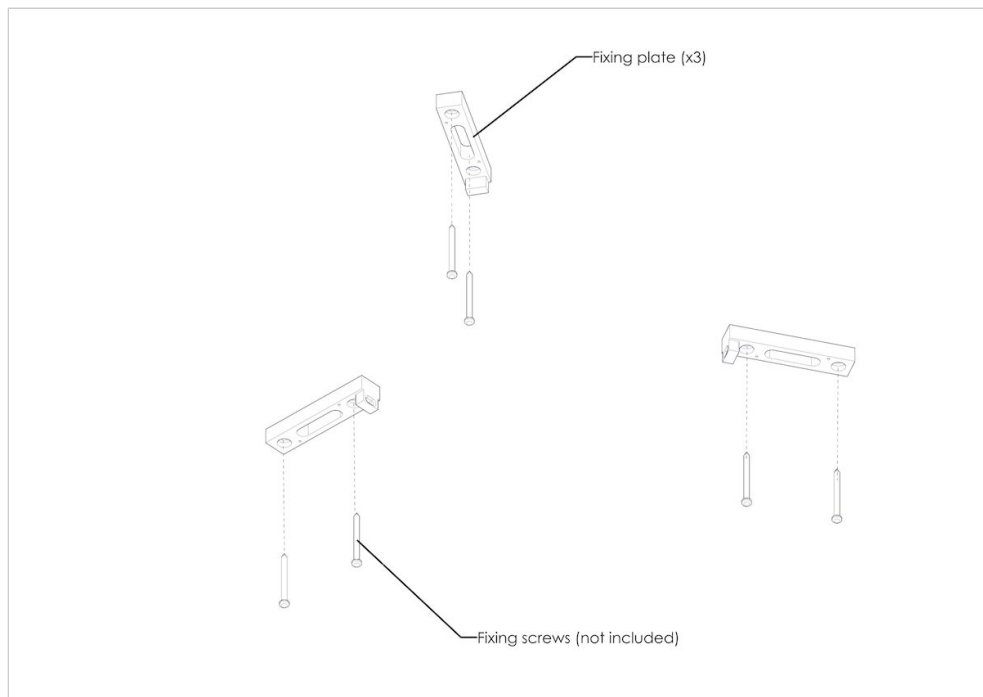

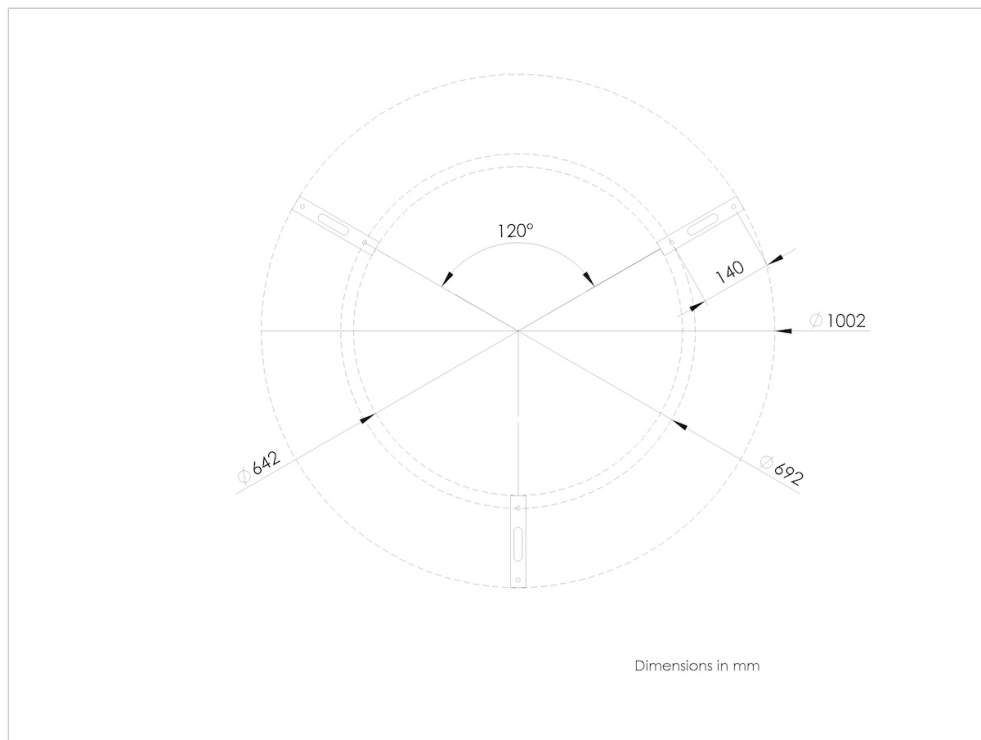


MOUNTING :

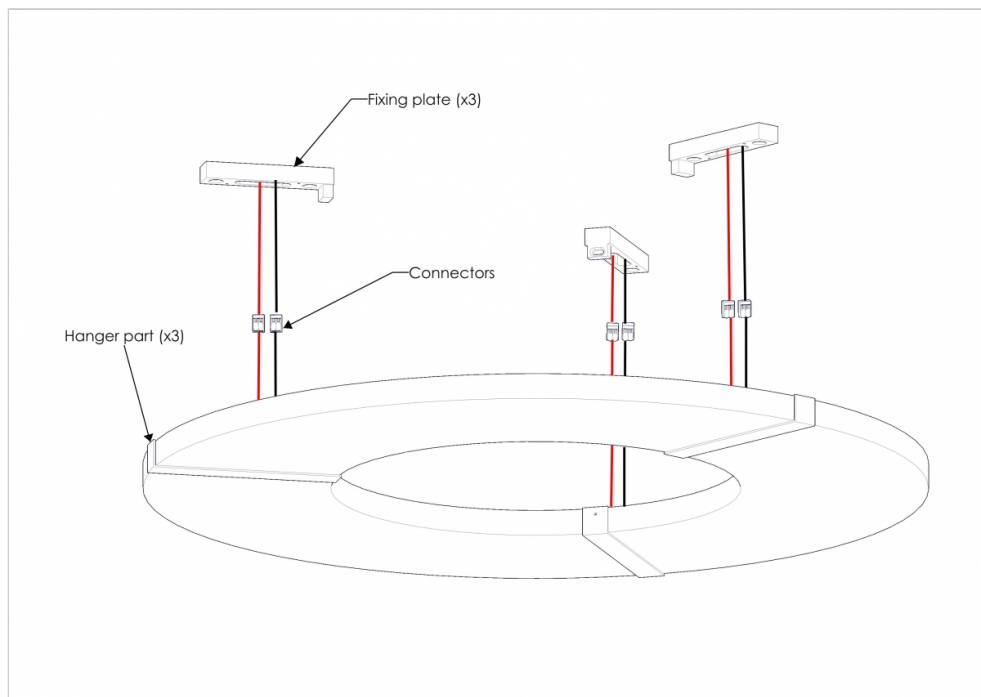

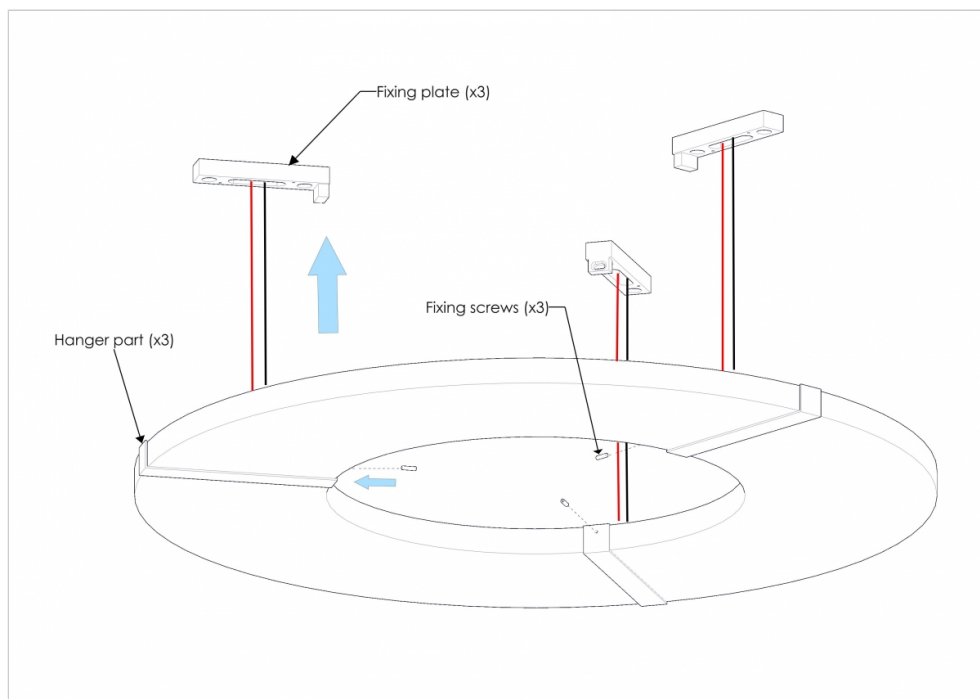

PACKAGING : The lamp is protected by a cardboard, wood, carton and polyethylene + polyurethane foam packaging.
 Weight light included: 30kg.
 Dimensions: 134x133x17cm.

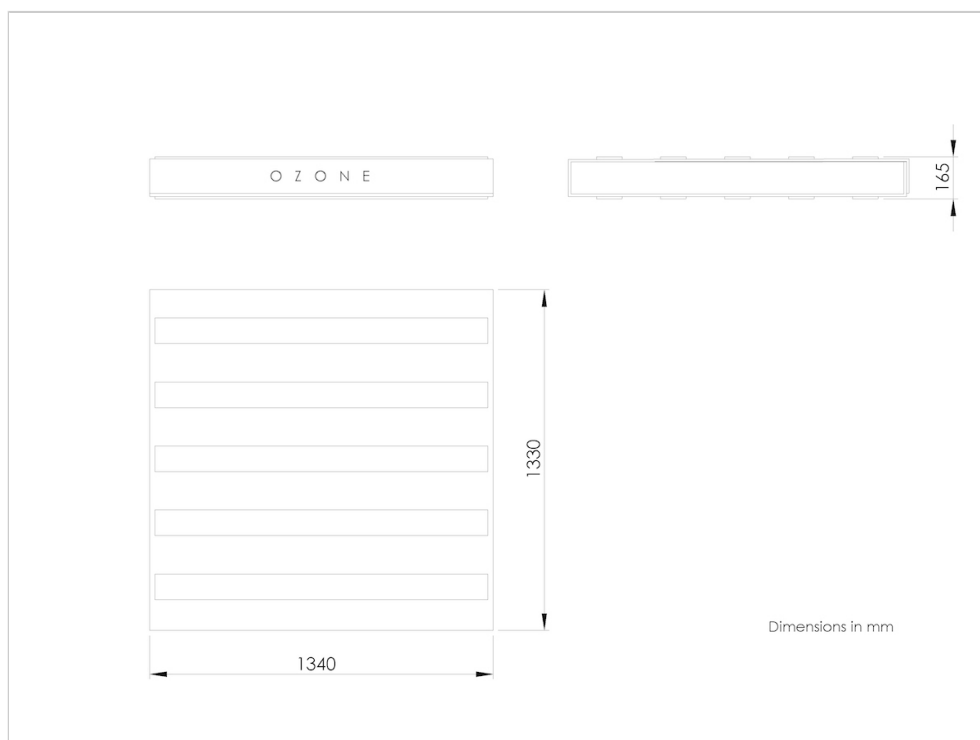

MAINTENANCE : The metal parts cleaning is done with a white soft damp cloth. For some traces locally you can use a soft cloth with glass cleaner.

The diffuser cleaning is carried out with a dry cloth. For some traces can be used locally with a soft damp cloth carefully.

